


Vestige louvre blade – Technical Data

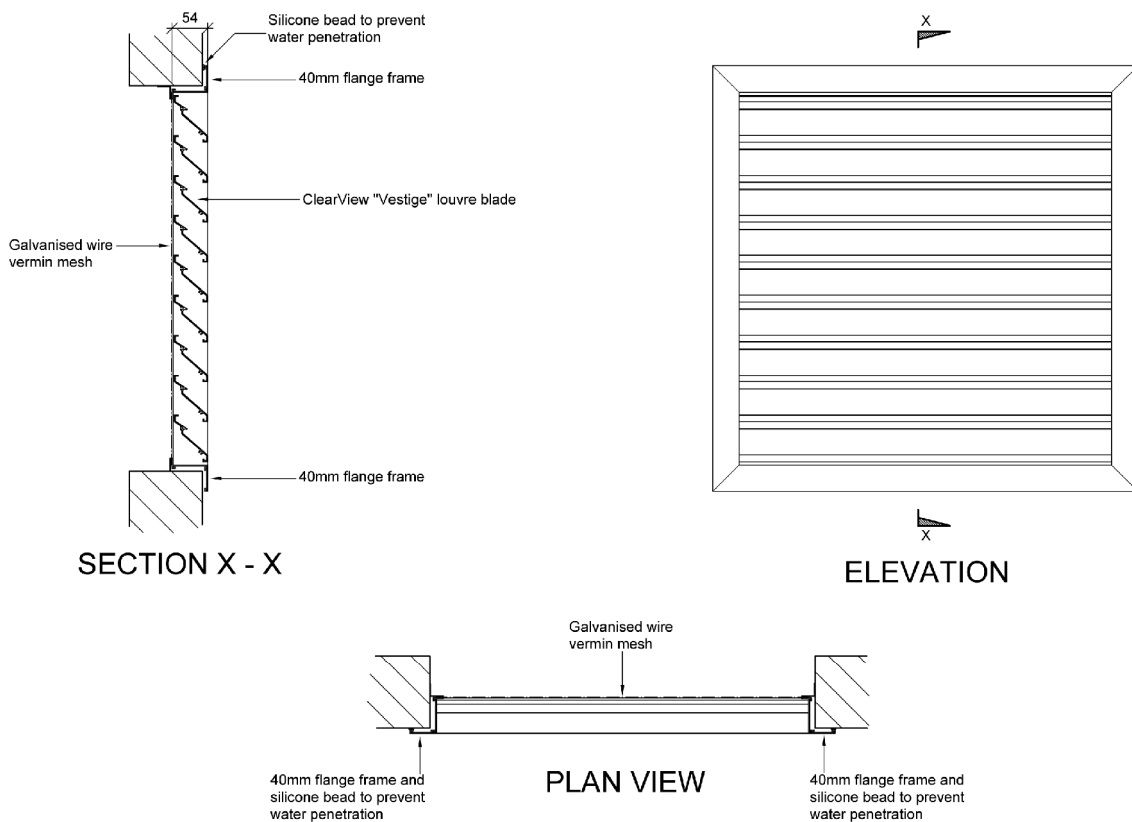

Vestige blade in flange frame

Material: Vestige louvre blades are manufactured in mill finish aluminium to AS/NZS 1866.

Finishes: Louvres can be provided in mill finish, natural anodised or powder coat finish.

Blade pitch: Standard blade pitch is 60mm which provides 55% free air. Blade pitch can be varied to suit opening size or air flow requirement. If blade pitch is more than 60mm, water penetration prevention cannot be maintained.

Bird mesh: Clearview provides bird/vermin mesh as standard to all framed louvres.

Mullions: Where panel width is greater than 1000mm, louvre support angles are required at a maximum of 900mm centres.

Wind Loads:

60mm pitch Wind Load KN/m ²	Panel Width (mm)			Max. Panel Height
	1000	1250	1500	
1.0	2005	1855	1740	
1.5	1755	1625	1525	
2.0	1595	1475	1385	
2.5	1485	1370	1250	